


Лампа T10 UL LED TUBE Day White 8W




Dimension:

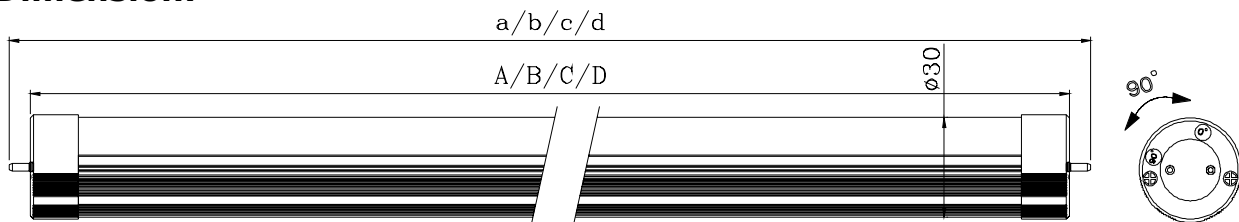

0.6M	A=0.59M	a=0.604M
0.9M	B=0.89M	b=0.91M
1.2M	C=1.2M	c=1.214M
1.5M	D=1.5M	d=1.514M

Range of tolerance: ±0.25mm

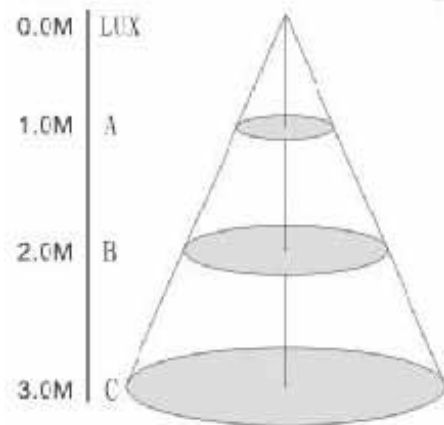

Parameter

Dimension (mm) L*W*H	0.6M	0.9M	1.2M	1.5M
Main material	cover PC fixture AL			
Average power consumption (W)	8	12	16	20
Input voltage (V)	AC110-277V			
LED quantity (Pc)	120	180	240	304
LED type	SMD			
Color	White /Day White/Warm White			
Luminous flux (Lm)	W/DW (530±15%) WW (505±15%)	W/DW (790±15%) WW (750±15%)	W/DW (1100±15%) WW (1060±15%)	W/DW (1450±15%) WW (1370±15%)
Color temperature (K)	6000-7000K (White) / 4000-5000K (Day White) / 3000-4000K (Warm White)			
illumination intensity (LUX)	A (130±10%)	A (180±10%)	A (220±10%)	A (300±10%)
	B (45±10%)	B (63±10%)	B (80±10%)	B (107±10%)
	C (27 ±10%)	C (36±10%)	C (45±10%)	C (60±10%)
Rendering index	72			
Net Weight (kg)	0.22±10%	0.34±10%	0.44±10%	0.52±10%
Package Size (mm)	655*190*275mm 1/24	960*190*275mm 1/24	1265*190*275mm 1/24	1565*190*275mm 1/24
Life expectancy (h)	50000-80000			

Usage

- Operating voltage: AC110-277V 50/60Hz
- Working environment: -20°C to 40°C
- Suitability: for indoor application only.

Quality Warranty

- Quality guarantee is based on storing, installing, operating and maintaining correctly in the normal operation condition.
- It is not included in our maintaining range when installing inappropriately, breaking the operating rules, and leading to the products damaging.
- Our company will maintain the right to either repair, parts replacing, or products exchange during the quality warranty period.

Safety Note

- Please do not hit or press it with heavy substance.
- Please Handle and transport gently
- Please do not touch and twist the tube when power is on.
- Light warm is normal when power is on.